

Sleeved rollers with Female Thread for manual handling – BS SLEEVE

BS54 & BS60 general purpose steel rollers with pvc 3mm or 5mm thick rubber like sleeve for manual & gravity applications


Found in >	MATERIAL	Sleeve Options	Great for
Battery Handling	Steel Base Roller + pvc sleeve	-BS54 (55mm FOD)	Protecting goods
Despatch Areas			Non-Marking
Airports		-BS60 (60mm FOD)	Stone/granite tops
Packing Lines	50-60 shore A		Cheaper than rubber



Roller Type	Finished Diameter	Female Thread (default)	Other Female Thread sizes available	Minimum Length Maximum Length	Load Capacity†
RG50AX88 –BS54	Ø55mm	M8x16	M6x12 (AX86)	>200MM <1200MM	80kgF UDL
RG50AX88 –BS60	Ø60mm	M8x16	M6x12 (AX86)	>200MM <860MM	80kgF UDL
RG50MDAX88 –BS54	Ø55mm	M8x16	M10x24 (AX810)	>200MM <1200MM	80kgF UDL
RG50MDAX88 –BS60	Ø60mm	M8x16	M10x24 (AX810)	>200MM <860MM	80kgF UDL
PR50AX88 –BS54	Ø55mm	M8x16	M10x24 (AX810)	>200MM <1200MM	140kgF UDL
PR50AX88 –BS60	Ø60mm	M8x16	M10x24 (AX810)	>200MM <860MM	140kgF UDL
PR50HDAX810 –BS54	Ø55mm	M10x24	M12x30 (AX812)	>200MM <860MM	200kgF UDL
PR50HDAX810 –BS60	Ø60mm	M10x24	M12x30 (AX812)	>200MM <860MM	200kgF UDL

IMPORTANT: †Load Capacity calculated on based roller (not Sleeve capacity) and on roller lengths <800MM. For lengths greater than 800mm please ask on enquiry.

Roller Type (ie RG50AX88-BS54)	
Installation Length (BB)	
Female Thread size	
Quantity Required	
Special Requests:	

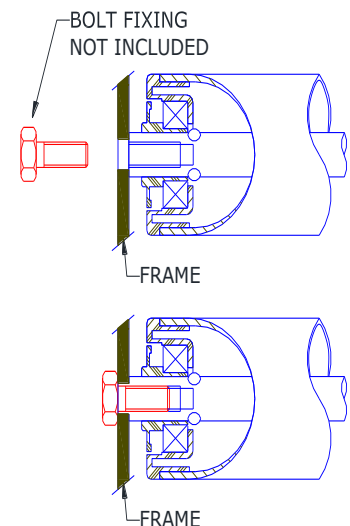

ORDERING CODE EXAMPLE: **PR 50 11H AX8 - BS60 610BB**

Roller Type ; Axle Size & Type ; Sleeve Diameter ; BB (Installation Length)

Company Name and address:-

Signed.....Print.....

Date: Purchase order No.....

Collect or Send by Carrier – circle as appropriate

Comments:

Please sign & return Order